

HANNAH

Tayana 58 Cutter Rigged Sloop
Currently Lying in the Bahamas - Registered in Guernsey UK
Offered at \$650,000 US

L.O.A 58'-0" / 17.68m

BEAM 16'-1" / 4.91m

BALLAST 17600 lbs / 7983 kg

SAIL ARE 1715 sq .ft / 159.3 sq .m

ENGINE (YANMAR) 4 cyl 160hp diesel

TANKAGE 2 x120 gal. fuel s/s, 250 gal. water s/s, 30 gal. holding grp

L.W.L 45'-11" / 14m

DRAFT SHOAL(OPTION) 6'-6" / 1.98m

DISPLACEMENT 48400 lbs / 21953 kg

DESIGNER Peter Beeldsnijder

SAILS (UK) Main, Yankee, Staysail

FULL SPECIFICATION

ENGINE & STEERING

Yanmar 4 cylinder 4JH-THE 160 B.H.P. marine diesel engine (750 Engine Hrs)

Flexible engine mounts.

Engine alarm systems.

Engine room blower.

Fiberglass drip pan.

Drip less shaft gland.

Lead foam insulated engine room.

Raw water strainer for engine intake.

Antisiphon valve.

Muffler/water lock system.

Shaft strut with cutlass bearing

Bronze prop. Shaft with rubber bearings and three-blade propeller.

Stuffing box.

Two Stainless steel fuel tanks with baffles, 240 imperial gal total capacity.

Edson pedestal cable steering or F.R.P. molded pedestal available.

Stainless steel "destroyer" type steering wheel.

Emergency steering system with tiller.

Rudder bearing.

Bronze Rudder Shoe skeg mounted rudder.

Vetus bowthruster 160kgf



SPARS & RIGGING

Selden Aluminum mast & boom with electrical conduit.

Three (4) halyards, main, genoa, staysail and spinnaker, led internally.

Internally led topping lift and outhaul. Anchor light.

Combination deck and steaming light.

Stainless steel standing rigging with Swage fitting.



ELECTRICAL

Newmar electrical panels.

A/C panel sections include two master breakers for two load groups.

D/C panel sections include two master breakers for two load groups.

Full gauges for DC and 110/240 V AC load groups.

240 volt shore power system. 240 volt outlets throughout.

Newmar 80A Battery Charger

12-volt 800AH batteries for service to whole yacht

Heavy duty battery selector switch.



HANNAH

Specification cont.

ELECTRICAL CONTINUED

Internal bonding system to all chain plates, thru hulls, engine and rudder system.

Zincs.

Numerous overhead cabin lights designed to interior lighting plan.

Engine room light.

Chart table light.

Running lights to international rule.

SAILS & CANVAS

Ulmer Kollius mainsail with reef points and cover. In mast Furling

Ulmer Kollius 100% Yankee with ready bag.

Ulmer Kollius or equivalent staysail with ready bag.

2 Cruising Chutes 12oz material suitable for up to 12/15 knots downwind



DECK FITTINGS

Non-skid side decks and cabin house top.

Electric Windlass - Maxwell V2200

Aluminum toe rail with integral fairleads.

Eight 12" aluminum mooring cleats.

Stainless steel double bow and stern pulpits.

Stainless steel stanchions with custom bases.

Three stainless steel boarding gates port, starboard and aft.

Triple life lines.

Stainless steel cockpit drains.

Four dorade vents.

Two stainless steel bulwark mounted pad eyes.

Four Lewmar or equivalent overhand hatches.

Stainless steel opening ports.

Mansfield Custom stainless steel fixed windows with safety glass.

Genoa tracks with cars.

Staysail tracks with cars.

Main sheet traveler with roller car.

Deck organizers.

F.R.P. cockpit coaming.

Two coaming lockers.

Teak cockpit sole, bridge deck, and sun deck.

Fiberglass molded propane storage compartment for two tanks.

Lazaret hatch.

Teak companionway drop boards.

Cut away transom with swim platform.

Custom stainless steel boarding ladder in stern

Custom stainless steel double bow roller/stem head fitting.

Chain locker with one deck pipe.

Boomkin (ketch only).



HANNAH

Specification cont.

WINCHES

All winches are Lewmar.

- 2- Two-speed #68CST Genoa (primary) winches. Electric
- 1- Two-speed #48CST Mainsheet winch. Cockpit coachroof
- 2- Two-speed #54CST secondary winches.
- 1-Two-speed #44CST Outhaul winch. Electric, cockpit coachroof
- 2- Two-speed #44CST secondary winches.
- 1-Two-speed #40CST halyard winch. Mast mounted
- 1-Two-speed #34CST halyard winch. Mast mounted
- 4-10" locking winch handles.




PLUMBING

- Two 120 gallon stainless steel fuel tanks.
- Two Stainless Steel water tanks, total of 250 gallons.
- Holding tank, FRP, 30 gallons.
- Macerator and pump for holding tank
- Hot water heater, 240 volt & engine heat exchanger.
- Manual marine heads.
- Hot & cold pressure water system to heads, galley & other areas as required.
- One high capacity manual bilge pump. Switches between engine and saloon bilges
- Two heavy duty electric bilge pump.
- Bilge pump strainers.
- Sea cocks on all through hull fittings.
- Shower sump tanks with 12 volt pumps in each shower stall.

INTERIOR FITTINGS

- Teak joinery & cabinetry throughout.
- Teak & holly cabin sole.
- Teak veneer in all lockers.
- Cream Corian counters in head & galley.
- Teak framed mirror in head(s).
- Interior teak handrails.
- Cloth cushion covers, contoured.
- Ice chest 4" foam, Stainless Steel lined.
- Interior varnish, polyurethane satin.
- Galley stove alcove, Stainless Steel lined.
- Easily removable head liners.
- Teak ceiling on all exposed hull areas.
- Teak fiddles and teak trim on counters & tables.
- Four inch foam cushions.
- Solid teak doors & frames.
- Engine room sound insulated.

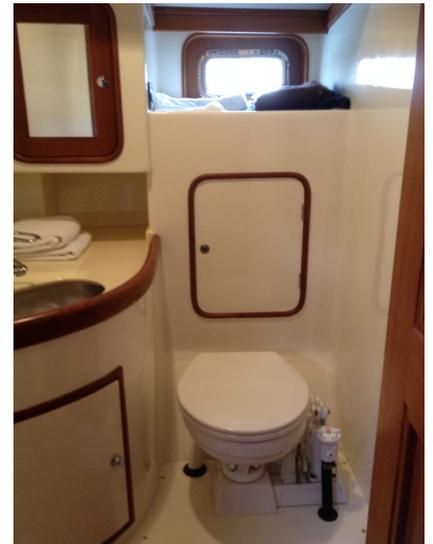

HANNAH

 Specification cont.

ADDITIONAL OPTIONS FITTED TO HANNAH

Teak deck

Teak rub rail with ss flat

Stainless Steel pedestal guard

Offshore type bow roller

Mast guard rail x 2

Deck wash down with pressure pump

Generator: Westerbeke with sound shield ugraded to 7.5 KVA (Generator Hrs 270)

Marine Air 2 X 10000 BTU 1 X 12000BTU

Microwave: Sharp Combi Convector & grill

L.P.G. Solenoid

Shore water receptacle

12v DC water tight outlet in cockpit

Indesit Washer Dryer

Int paint & 5 coats gelshield 200 & 3 coats micron CSC

Manual freshwater pump in galley

Electrically operated toilet x 2

Electric Inmast furling with part battened main

Stainless Steel Anchor

Electronics added incl. Plotter / Radar / Navtex / VHF / Graphic Displays

All electronics are duplicated above and below decks.

Deck blocks / sheaves for running rigging / main sail

200 ft - ½ Inch chain

“Butter Cream” coloured corian (galley & heads)

H&C Shower faucet in transom

Screens for port lights & hatches

Copper screening for electrical bonding (complete)

Insulators for backstay

Furlex RF Yankee 400s 14-22500

Furlex RF Staysail 400s 12 - 17700

RF Yankee with foam Luff & UV

RF Staysail with foam Luff & UV

Cockpit table

Sprayhood

Binnacle Cover

Cockpit Bimini

Inflatable Tender and 5hp outboard

Various safety equipment and numerous spare parts sheets, halyards and and boat fittings



This information is as accurate as possible, any questions will be answered in detail should you require. Please do not hesitate to contact us.